

SDRM201

Static / Dynamic Resistance Measurement

Accessory for EGIL



- Enables resistance measurement on circuit breakers
- Small and light weight
- A number of operations can be run with short waiting intervals

DESCRIPTION

The SDRM201 is an accessory for EGIL. EGIL must be equipped with the SDRM option and CABA Win version R03A or higher is needed.

The SDRM201 is intended to use for both static and dynamic resistance measurements (SRM and DRM) on high voltage circuit breakers or other low resistive devices. Used together with EGIL the current and also the voltage-drop across the circuit breaker contacts are measured. The measuring unit can thus calculate the resistance as a function of time.

A system consists of an SDRM201 unit with current cables and an SDRM Cable. The SDRM Cable is a small box with integrated cables for connection to the SDRM201 and to EGIL.



The red current cable is 3.0 m (9.8 ft) and the black one is 0.5 m (1.6 ft).



The SDRM Cable.

SPECIFICATIONS SDRM201

Inaccuracy is specified for 1 year after calibration at 22 °C to 28 °C, relative humidity 90%. Specifications are valid, after 30 minutes warm up time. Specifications are subject to change without notice.

Environment

Application field The instrument is intended for use in high-voltage substations and industrial environments.

Installation category CAT I

Pollution degree 2

Temperature

Operating -20°C to +50°C (-4°F to +122°F)

Storage & transport -40°C to +70°C (-40°F to +158°F)

Vibration

IEC 60068-2-6

2 g for 5-500 Hz

Shock (non-operating)

IEC 60068-2-27

30 g, half-sine, 11 ms

Degree of protection

SDRM201/202 (Box) and IP 43

SDRM Cable inter-connected

SDRM Cable IP 41

Humidity

5% – 95% RH, non-condensing

CE-marking

LVD

2006/95/EC

EMC

2004/108/EC

General

Power inlet

24 V / 2.5 A



Voltage 24 V DC (max) 21 V DC (min)

Current 2.5 A (max 50% intermittence)

Dimensions

160 x 240 x 90 mm
(6.3"x 9.4"x 3.5") excl. binding posts

Weight

1.3 kg (2.9 lbs)
2.5 kg (5.5 lbs) incl. current cables

Total incl. transport case with accessories 9.4 kg (20.7 lbs)

SDRM Cable EGIL 0.2 m (0.7 ft), 0.6 kg (1.3 lbs)

Extension cable 7.5 m (24.5 ft), 0.7 kg (1.5 lbs)

SDRM201 – Terminals

CURRENT OUTPUT terminals – and +

Open circuit 2.5 V DC (max)

Short circuit current (max)

Instantaneous 500 A DC

After 2 seconds 150 A ±10%

Minimum current with cables

Instantaneous 200 A DC

After 1 second 140 A DC

Overvoltage protection 45 V between terminals and between terminals and ground

Not to be connected to circuits generating peak power pulse above 1500 W (10/1000 µs)

SDRM Cable – Terminals

EGIL SDRM


Measurement ranges

DRM / MOTION mode 0 – 32 mΩ

SRM mode 0 – 2 mΩ

DRM mode 0 – 32 mΩ

SRM inaccuracy 2% ±2 µΩ

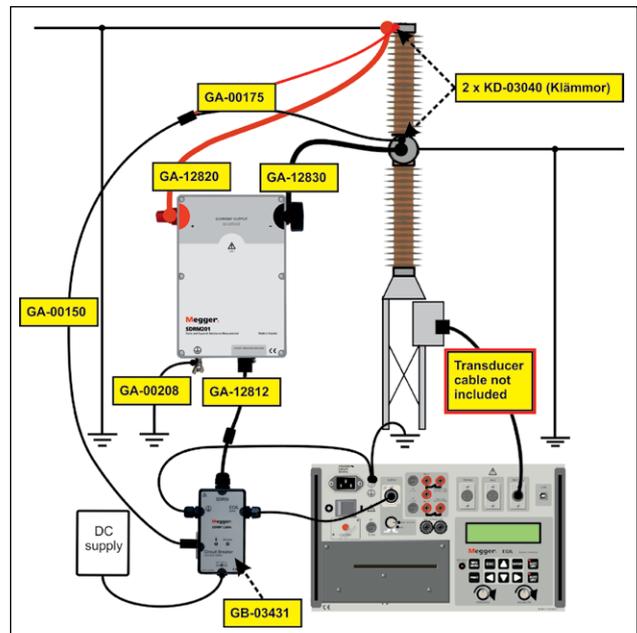

ORDERING INFORMATION

| Item | Art. No. |
|---|----------|
| SDRM201 for EGIL | CG-90250 |
| Included accessories | |
| SDRM Cable | GB-03431 |
| SDRM multi cable extension | GA-12812 |
| Voltage sense | GA-00175 |
| Voltage sense extension cable | GA-00150 |
| Current cable (red) | GA-12820 |
| Current cable (black) | GA-12830 |
| Clamps (2 pcs) | KD-03040 |
| Ground cable | GA-00208 |
| Optional accessories | |
| Extension cables for multi cable | |
| 10 m (33 ft) extension | GA-12812 |

Postal address
Megger Sweden AB
Box 724
SE-182 17 Danderyd
SWEDEN

T. 08 510 195 00
E. seinfo@megger.com

SDRM201_DS_en_V05a

Printed matter:
Art.No. ZI-CG03E ■ Doc. CG1850EE ■ 2017
Subject to change without notice

Registered to ISO 9001 and 14001
The word 'Megger' is a registered trademark