

# WÖHLER



## Visual Inspection Systems

Cameras for the professionals

The Measure of Technology

  
Made in Germany

# YOUR INTERNATIONAL WÖHLER TEAM



## Wöhler Technik GmbH Headquarters Germany

Wöhler-Platz 1  
33181 Bad Wünnenberg

+49 2953 73 100  
international@woehler.de  
woehler-international.com

Monday to Friday  
8 am – 5 pm



**Bianca Böhner**  
Area Sales  
Manager



**Marcus Fitze**  
Business Development  
Manager International



**Robin Liebing**  
Business Development  
Manager International



**Thiemo zur Hausen**  
Area Sales  
Manager



**Yann Hala**  
Junior Business  
Development Manager  
International

## Wöhler Visual Inspection Systems

### HD Visual Inspection

Wöhler VIS 750 HD Visual Inspection System .....	4 – 7
Wöhler VIS 700 HD Visual Inspection System .....	8 – 11
Wöhler L 200 Locator .....	12
Wöhler VIS Camera Trolley .....	13
Accessories HD Inspection Technology .....	14-15

### Visual Inspection

Wöhler VIS 500 Visual Inspection System .....	16-19
Wöhler VIS 350 PLUS Visual Inspection System .....	16-17
Wöhler VIS 300 / 350 Visual Inspection System.....	22-23
Wöhler VIS 200 / 250 Visual Inspection System .....	24-25
Wöhler L 200 Locator .....	26
Wöhler VIS Camera Trolley .....	27
Accessories Inspection Technology .....	28-31
Wöhler SI 400 Smart Inspection Camera.....	32-33

### Mirrors

Wöhler Glass Mirror .....	34
Wöhler Chimney Mirror .....	35

### HD Endoscopy

Wöhler VE 500 HD Video Endoscope .....	36
Wöhler VE 400 HD Video Endoscope .....	37
Wöhler VE 220 HD Video Endoscope.....	38
Overview Probes .....	39



Hold the camera of your smartphone over the QR code to be scanned and scan it. Once the code has been read, the relevant product is automatically called up on the Wöhler homepage. Now all you have to do is add it to your shopping basket and order.

# Wöhler VIS 750 HD Inspection Camera

## Every detail considered

With the Wöhler VIS 750 HD Inspection Camera, no pipe is too long and no corner too dark. You can easily spot even the tiniest leaks, the toughest blockages, and annoying root ingrowth. The easy-to-use design lets you get things done fast and effectively, because we understand that your time is super valuable. The Wöhler VIS 750 HD Inspection Camera stands out with its clever features, making it one-of-a-kind.

### Versatile monitor cover

The removable front flap is also an integrated glare shield.

### Removable monitor

Do you require both hands for the inspection? The HD monitor can be easily detached. You can stick it to magnetic surfaces or use the stand to set it up wherever you need it.

### Fully flexible

The 60 m camera push rod is perfect for covering long distances in sewers, while the alternative 40 m push rod works well for navigating multiple bends in pipework.

### Reliable assistant

You should not be squeamish during the inspection. The trolley ensures the technology is safe throughout the process. The flaps come with a break-resistant feature and can be easily detached.

### Everything is to hand

The Wöhler VIS 750 HD Inspection Camera is versatile enough for any task, thanks to its multiple setup options. Plus, the trolley's flexible handle makes transport easy and convenient.

### Clean work

The camera push rod, which is built into the trolley, is simple to maintain: After you're done using it, just take a cloth and wipe down both the camera push rod and the camera head. For a deeper clean, you can easily detach the reel and give it a rinse with a water hose.



# Wöhler VIS 750 HD Inspection Camera

Inspection of sewers / air ducts / industrial pipelines



## Features

- 60 m camera push rod is perfect for covering long distances in sewers, the alternative 40 m push rod works well for navigating multiple bends in pipework
- The Wöhler VIS 750 HD Inspection Camera is suitable for any application thanks to its various installation options
- Trolley ensures the technology is safe throughout the process
- Built-in transmitters in both camera heads enable radio localisation
- Position and angle display for orientation in the pipe
- The comment function allows you to add written comments to an image or video
- Live image transmission via WiFi thanks to the free Wöhler Video Inspection App

## Technical data

Monitor	TFT display	7" / 16:9 Format
	Resolution	1,280 x 800 px
	Connection cable	2 m
	Power supply	USB-C 5 V / 3 A 36 V / 14 Ah Li-Ion Battery
Push rod	Operating time	Up to 4 h
	Length	40 / 60 m digital metre counting

## Wöhler VIS 750 HD Inspection Camera EN Camera rod 40 m, camera head Ø 40 mm

Wöhler VIS 7 HD monitor unit with 7" HD TFT widescreen colour monitor incl. 2 m connection cable, Glare shield, Lithium-ion battery, Wöhler HD pan/tilt camera head Ø 40 mm, pluggable, Camera rod, 40 m long (removable for cleaning), 10 spare plastic domes, USB mains charger with USB-C cable, Trolley case

Article no. 11772 J

## Wöhler VIS 750 HD Inspection Camera EN Camera rod 60 m, camera head Ø 40 mm

Scope of delivery: Wöhler VIS 7 HD monitor unit with 7" HD TFT widescreen colour monitor incl. 2 m connection cable, Glare shield, Lithium-ion battery, Wöhler HD pan/tilt camera head Ø 40 mm, pluggable, Camera rod, 60 m long (removable for cleaning), 10 spare plastic domes, USB mains charger with USB-C cable, Trolley case

Article no. 11771 J



## Modular system

One system – many applications



Wöhler VIS 750 trolley




Wöhler HD-Miniature Camera Head Ø 26 mm  
Article no. 25470 J

and / or




Wöhler HD-Camera Head Ø 40 mm  
Article no. 25463 J



Blue

40 m camera push rod:  
Inspection of pipework  
with several bends



Black

60 m camera push rod:  
Inspection of sewers with  
long distances

## Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/shop/P\\_202](https://woehler-international.com/shop/P_202)



24  
7

# Wöhler VIS 700 HD Inspection Camera

## Overview of functions

### Video inspection for clear, precise images

Digital recording and playback of high-resolution video/photos for crisp, clear images.

### Description of damage & voice comments

In the photos, a comment function allows you to insert a description of the damage. It is also possible to add voice comments to videos.

### Customised focus setting

The motorised focus can be adjusted as required using the touch screen or joystick.

### Position, angle and digital meter display

Direct display of the position of the camera head in the tube. The uncoiling length of the camera rod is recorded electronically and displayed in the image.

### Flexible operation

The monitor can be attached to the case holder in two variants – the image rotates automatically by 180°. The operation is very simple via a few buttons. The monitor can be swivelled and rotated and can be removed from the case up to 1.5 m.

### Easy cleaning and plenty of space for accessories

The easy-to-open bottom shell makes the case and removable basket with rod easy to clean. The double-walled hard case also protects the camera head and the monitor.



### Handle

The individually adjustable handle ensures that you hold the monitor firmly during the inspection.

### Glare protection

The glare shield can be stored in the case lid and plugged directly onto the monitor when needed.

### Live image transmission via WiFi network

For transferring the video signal to a mobile device and for easy report generation.

### Powerful Lithium-Ion battery and fast charging process

Powerful with an operating time of approx. 6 hours – fast charging via USB-C port.

### USB stick

Documentation can be stored in the internal camera memory or on a USB stick. Ideal for passing on to the customer directly on site

### Pan & tilt camera head Ø 40 mm

The colour camera head can be swivelled from left to right by 180° and rotated by 360°. Focus range can be precisely adjusted. Waterproof IP 67. Optional: HD Miniature Camera Head Ø 26 mm water pressure-proof IP 68.

### Stable camera rod

The camera rod can be pulled out up to 30 m and its design makes it both archable and stable at the same time.

# Wöhler VIS 700 HD Visual Inspection System

Visual inspection of sewers / air ducts / flue systems / industrial machinery



### Features

- High Definition picture
- Focus control via joystick
- Adjustable sonde frequency
- Voice recording / photo function
- Touch screen keyboard for written commentary
- App-supported operation and report creation

### Technical data

Monitor	TFT display	7" / 16:9 Format
	Resolution	1,280 x 800 px
	Connection cable	2 m
	Power supply	USB-C 5 V / 3 A 3.7 V / 11.4 Ah
Push rod	Operating time	4 h
	Length	20 / 30 m digital metre counting

### Wöhler VIS 700

**Camera rod 30 m, camera head Ø 40 mm**

Scope of supply: Wöhler VIS 700 monitor with 7" HD TFT with 1.5 m cable and Lithium-Ionen battery, pan & tilt camera head Ø 40 – detachable, camera push rod 8.6 x 5.6 mm – 30 m long, 3 replacement plastic domes for camera head, 1 anti slide mat, USB charger EU with USB-C-cable, Plastic case

Article no. 7450 J

### Wöhler VIS 700 Camera

**Camera cable 20 m, camera head Ø 40 mm**

Scope of delivery: Wöhler VIS 700 monitor with HD TFT monitor 7", Glare protection, Lithium-Ionen battery, Pan & Tilt color camera head Ø 40 mm, detachable, Camera cable 20 m long with metric marking, 3 replacement plastic domes, USB-charger EU with USB-C-cable, Plastic case, Carrying strap

Article no. 7454 J




### Wöhler Inspection App

The monitor image can be sent to mobile devices via WiFi and further processed using the app.

## Modular system

One monitor – many applications

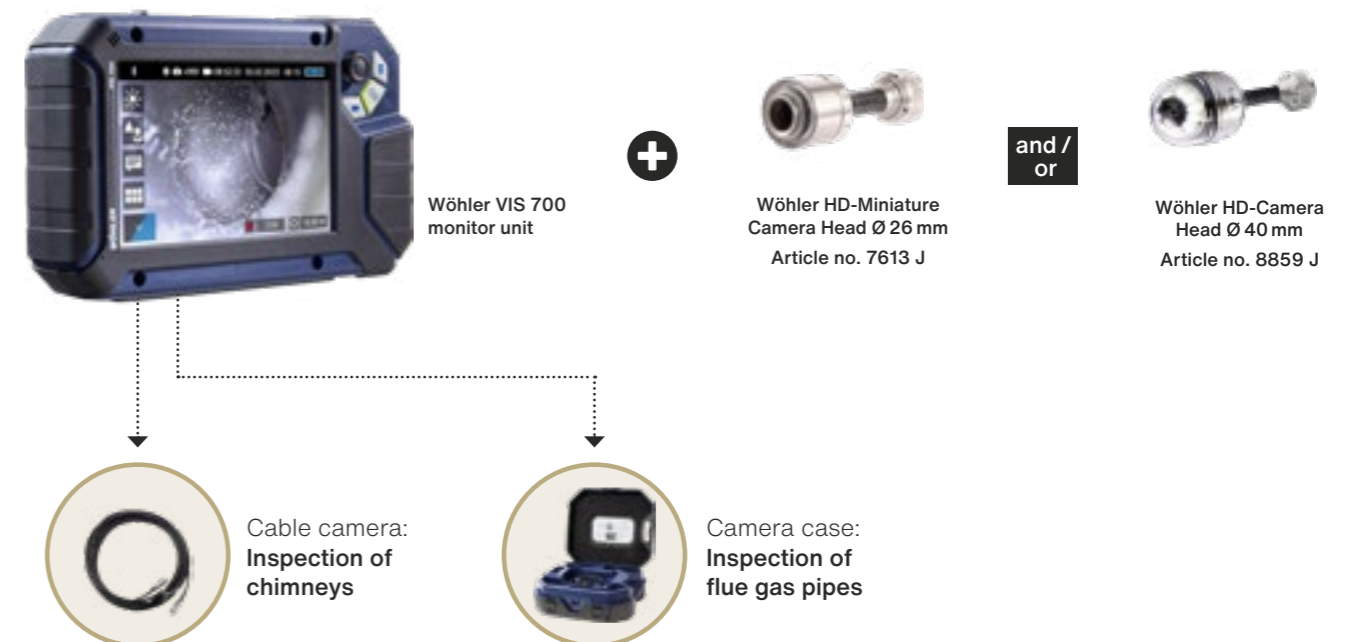

### Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/P\\_16510](http://woehler-international.com/P_16510)



# Wöhler L 200 Locator

Exact localisation of the camera head



### Features

- Exact localisation of the camera head in pipelines, chimneys, floor or ceiling areas etc.
- Acoustic signal for orientation via loudspeaker or headphones
- Crosshairs and signal strength indicate how far away and in which direction the camera head is located
- Quick detection of damaged areas with the camera heads Ø 26 / 40 mm
- Locating the radio signals of the camera head enables the damage site to be found quickly
- Bright, easy to read colour display
- Easy handling thanks to spatial guidance via the display during the locating
- Telescopic pole enables the detection of the damaged areas without any problems and everywhere
- Chalk holder enables the direct marking of the damaged areas

### Technical data

Locator Receiver	Display	Graphical display of the camera head position
Output impedance headphones	32 Ohm	
Power supply	Lithium-ion rechargeable battery	
Frequency	9.2 kHz, 8.9 kHz	



Compatible with all current Wöhler VIS camera systems!



### Wöhler L 200 Locator

Telescopic pole, Headphones, USB power supply with Micro-USB cable, Chalk (12 pcs. box, yellow), Plastic case

Article no. 7430 J

# Wöhler VIS Camera Trolley

Optimal guidance of the camera head


### Features

Optimal guiding of the camera head:

- In ventilation lines from Ø150 mm / 150 x 150 mm
- In drain ducts from Ø150 mm / 150 x 150 mm
- In drawn chimneys from Ø150 mm / 150 x 150 mm
- Suitable for:
  - All Wöhler VIS camera heads (Ø 26 / 40 mm)
  - Various accessories such as additional lighting, stabilising sleeve and dome protection
- Plastic wheels ensure optimum guidance in round and flat lines
- With the help of the adjustment rail, the camera trolley can be adjusted in three heights and placed backwards or forwards in 3 steps
- Camera head can be mounted on the trolley or suspended underneath it
- Rugged body is made of corrosion and acid resistant stainless steel and is still 700 g light



Compatible with Wöhler VIS 2xx / 3xx / 500 / 700 camera systems

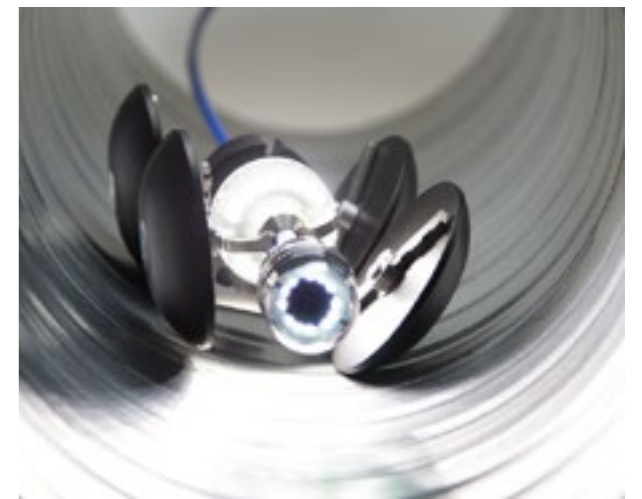

### Wöhler VIS Camera Trolley

Camerahead-holder, Storage bag Wöhler VIS Camera Trolley, For inspection of pipes > 150 mm

Article no. 4705 J

### Wöhler VIS Camera Trolley

Camerahead-holder, Storage bag Wöhler, Stabilisation sleeve for light ring 26/40, (can only be used in combination with supplementary light)

Article no. 4753 J



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/7430](http://woehler-international.com/7430)





















Wöhler online shop




















Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/4705](http://woehler-international.com/4705)



# Accessories

Accessories HD Inspection Technology	Article no.
 Wöhler HD-Miniature Camera Head Ø 26 mm for Wöhler VIS 750 Detachable, digital camera head for colour image	25470 J
 Wöhler HD-Camera Head Ø 40 mm for Wöhler VIS 750 detachable	25463 J
 Wöhler HD-Miniature Camera Head Ø 26 mm for Wöhler VIS 700 Detachable, digital camera head for colour image with leather protective case	7613 J
 Wöhler HD-Camera Head Ø 40 mm for VIS 700 with leather protection bag	8859 J
 Wöhler Light Ring 26/40, detachable for VIS 700 HD Cameras For detachable camera heads only. The additional lighting with 18 white LEDs is installed between the camera head and the camera rod. Power is supplied via the video inspection system.	8818 J
 Wöhler Guidance Set 70 for camera head Ø 26 mm guidance sleeve with protection cage, centering brush	3883 J
 Guidance Set 100 for camera head Ø 40 mm protection sleeve with cut-out, roller guide and centering brush	4240 J
 Camera holder for Wöhler VIS 700 for pan and tilt digital camera head Ø 40 mm on sweeping rod with M10 thread for sliding in chimneys and ventilation ducts with GRP camera rod or sweeping rod and camera cable; 180° viewing direction	7068 J
 Wöhler Camera Spring Guide for Wöhler VIS 500 / 700 for Wöhler pan/tilt camera head Ø 40 mm	7081 J
 Replacement Plastic Domes (10 pcs.) for Wöhler VIS 350 / 500 / 700 / 750 for Wöhler Camera Head Ø 40mm	3675 J
 Glass Dome for Wöhler Camera Head Ø 40 mm	13674 J
 Protection Sleeve for Wöhler Camera Head Ø 40 mm Easy installation and secure hold thanks to clamping lever, particularly good visibility thanks to a round recess in the dome area	2641 J
 Camera Roller Guide for Wöhler VIS 350 / 500 / 700 / 750 suitable for camera heads and rods	3681 J
 Guidance Ball for Wöhler VIS 350 / 500 / 700 for camera heads and rods Ø 30 x 27 mm for GRP camera rods Ø 6, Ø 6.5 and Ø 7 mm as well as for miniature camera heads improves ability to go through bends for miniature camera head 26 mm	3634 J
 Guidance Sleeve for camera head Ø 26 mm increases arc mobility and protects the camera head	3827 J
 VIS Centering Brush for Wöhler VIS 250 / 350 / 500 / 700 for camera heads and rods Ø 20 cm with 6 strip brushes as spacers, can be fixed directly behind the camera head	3850 J
 VIS Centering Brush for Wöhler VIS 250 / 350 / 500 / 700 for camera rods Wöhler rod element Ø 20 cm with 6 strip brushes, threaded on one side	3854 J
 Centering Brush Extension for Wöhler VIS 3xx (detachable versions) / VIS 400 / VIS 700 Ø 20 cm to extend centering brush art. 3854	3853 J

Accessories	Article no.
 Wöhler Stabilisation Sleeve for VIS 700 push camera for Ø 26 or Ø 40 mm camera heads in combination with light ring. To stabilise the connection between camera push rod and camera head.	6557 J
 Spare Brushes for centering brush, 24 pieces for replacing the camera guide, rod element and extension element Can be flexibly cut to Ø 70 to Ø 200 mm	3858 J
 Stabilisation Tube for Wöhler VIS 2xx / 3xx (detachable versions) / VIS 400 / VIS 700 to connect centering brush & extension	21736 J
 Push adapter for stabilisation sleeve for VIS 2xx / VIS 3xx / VIS 400 / VIS 700 for pushing all 26 and 40 mm camera heads without using the additional light ring (stabilisation sleeve 3591 / 22182 needed)	1387 J
 Wöhler Telescopic Tube 1.6 m for HD Camera head, VIS 700 length of the telescopic tube 0.9-1.6m plus gooseneck 0.3m	7670 O
 Wöhler Telescopic Tube 3.4m for HD Camera head, VIS 700 length of the telescopic tube 0.9-3.4m plus gooseneck 0.3m	7659 O
 Camera Cable Wöhler VIS 700 with metric marking 20 m	6305 J
 30 m	11012 J
 Camera cable extension Wöhler VIS 700 incl. metric marking 10 m	11425 J
 20 m	11426 J
 30 m	11427 J
 Wöhler VIS Cleaning Set with plastic case 1 liter disinfection spray, 50 cleaning tissues, 100 disposable gloves size XL (powder free), 200 ml lubricant, plastic case For approx. 50 applications	4725 I
 Wöhler VIS Cleaning Set Refill 1 liter disinfection spray, 50 cleaning tissues, 100 disposable gloves size XL (powder free), 200 ml lubricant, in plastic bag For approx. 50 applications.	4726 O
 Carrying Strap System for Wöhler VIS 500 / 700 with mounting plate for monitor unit	6921 J
 Magnetic Holder Monitor for Wöhler VIS 500 / 700	2939 J
 Anti-reflective Film for Wöhler VIS 500 / 700 / 750 with mounting accessories Display protection function, 150 x 94 mm	7616 X
 Storage Box with Foam for Wöhler VIS 700 for Light Ring and camera head	24657 K
 Power supply for Wöhler VIS 700 EU-Version	62622 X
 Guidance Weight for Wöhler VIS 350 / 500 / 700 for camera heads and rods for lowering the camera head – compensates for the bending of the GRP camera rod. Stainless steel guide weight 740 g	3857 J



Wöhler Video Inspection App  
The monitor image can be sent to mobile devices via WiFi and processed further using the app.

# Wöhler VIS 500 Inspection Camera

## Overview of functions

### High image and video quality

High resolution images allow a view of every detail.

### Flexible operation

The monitor can be attached to the case holder in two variants – the image rotates automatically by 180°. The operation is very simple via a few buttons. The monitor can be swivelled and rotated and can be removed from the case up to 2 m.

### Position, angle and digital meter display

Direct display of the position of the camera head in the tube. The uncoiling length of the camera rod is recorded electronically and displayed in the image.

### Voice comments

Voice commentary can be added via headset during video recording.

### Easy cleaning and plenty of space for accessories

The easy-to-open bottom shell makes the case and removable basket with rod easy to clean. The double-walled hard case also protects the camera head and the monitor.



### Glare protection

The glare shield can be stored in the case lid and plugged directly onto the monitor when needed.

### Live image transmission to the app

For transferring the video signal to a mobile device and for easy report generation.

### Powerful Lithium-Ion battery and fast charging process

Powerful with an operating time of approx. 6 hours – fast charging via USB-C port.

### USB stick

Documentation can be stored in the internal camera memory or on a USB stick. Ideal for passing on to the customer directly on site.

### Pan & tilt camera head Ø 40 mm

The colour camera head can be swivelled from left to right by 180° and rotated by 360°. Waterproof IP 67. Optional: Miniature Camera Head Ø 26 mm water pressure-proof IP 68.

### Stable camera rod

The camera rod can be pulled out up to 30 m and its design makes it both archable and stable at the same time.

# Wöhler VIS 500 Visual Inspection System

Visual duct, flue gas and ventilation system inspection



### Features

- Damage analysis, non-destructive inspection and documentation of:
  - 87° bends
  - Sewer pipes from Ø 40 mm
  - House connections up to Ø 200 mm
  - Air pipes and ducts
  - Intermediate ceilings, cavities, shafts
  - Industrial machines / plants
- The universal camera for your applications: Interchangeable camera head, sound and voice recording via headset and different rod lengths.
- Waterproof rotatable and pan and tilt camera head Ø 40 mm for an all-round view
- Easy operating and reporting with the Wöhler video inspection app
- Bright illumination with camera LEDs and optional additional lighting
- Intuitive handling with uniform operating concept of the Wöhler VIS series

### Technical data

Monitor	TFT display	7" / 16:9 Format
	Resolution	1,024 x 600 px
	Connection cable	2 m
	Power supply	USB-C 5 V / 3 A 3.7 V / 11.4 Ah Li-thium-Ionen Akku
	Operating time	6 h
Camera rod	Length	20 / 30 m electr. meter counting

### Wöhler VIS 500 Inspection Camera Camera rod 30 m, camera head Ø 40 mm

Scope of delivery: Wöhler VIS 500 monitor unit with 7" TFT widescreen colour monitor incl. 2 m connection cable (monitor removable), Glare protection, Lithium-ion battery 6 h operation time, Data storage: Internal memory 4 GB expandable with USB stick, Wöhler pan and tilt camera head Ø 40 (detachable), Camera rod Ø 6.5 mm / 30 m long (removable for cleaning), USB mains charger with USB-C cable, Double sided suitcase, Replacement plastic domes (3 pieces)

Article no. 11508 J

### Wöhler VIS 500 Inspection Camera INT Cable Reel 30 m, camera head Ø 40 mm

Scope of delivery: Wöhler VIS 500 Monitor, Pan & tilt camera head Ø 40 mm, Camera cable 30 m on a cable reel, Transport case XXL, Carrying strap system

Article no. 12343 J



### Wöhler Inspection App

The monitor image can be sent to mobile devices via WiFi and further processed using the app.

## Modular system

One monitor – many applications



Wöhler VIS 500 monitor unit



Wöhler Miniature Camera Head Ø 26 mm  
Article no. 420 J

and / or



Wöhler Camera Head Ø 40 mm  
Article no. 870 J



Camera case:  
Inspection of flue gas pipes



Push camera:  
Inspection of flue gas pipes & chimneys



Cable camera:  
Inspection of chimneys



Cable reel:  
Inspection of flue gas pipes & chimneys

### Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/P\\_18810](http://woehler-international.com/P_18810)



# Wöhler VIS 350 PLUS Visual Inspection System

Inspection of pipes / air ducts / exhaust systems



## Features

- Analyse damage and inspect of:
  - Waste water lines of Ø 40 mm and larger
  - House connections up to Ø 200 mm
  - Flue gas systems of Ø 40 mm and larger
  - Ventilation ducts
  - False ceilings, hollow spaces, shafts
  - Industrial machines
- Wide range of applications due to interchangeable camera heads (Ø 26 / 40 mm)
- Quick & simple change of heads
- Position of camera head indicated in the display
- Keep your sense of orientation with home function – camera aligns itself automatically
- Picture and video recording
- 2 batteries for up to 4 hours operation
- Built-in location transmitter facilitates wireless location detection

## Technical data

Monitor	TFT display	7" / 16:9 Format
	Resolution	1,024 x 600 px
	Power supply	Space for 2 rechargeable batteries or via power supply unit
	Operating time	4 h
Push rod	Length	30 m electr. meter counting
	Diameter	Ø 6.5 mm

## Wöhler VIS 350 PLUS Camera

### Camera rod 30 m, detachable camera head Ø 40 mm

Scope of delivery: Wöhler VIS 350 Service Camera, digital meter counter, pan and tilt colour camera head Ø 40 mm (detachable), Wöhler TFT monitor 7" with 2 m cable, SD memory card 4 GB for recording of pictures and videos, mini USB cable, 30 m push rod 6.5 mm, 5 replacement plastic domes, 1 anti-slide-mat, 2 NiMH batteries and charger, plastic case

Article no. 8991 J

## Wöhler VIS 350 PLUS Camera

### Camera rod 30 m, detachable with 2 camera heads Ø 26 mm and Ø 40 mm

Scope of delivery: Wöhler VIS 350 Service Camera, pan and tilt colour camera head Ø 40 mm (detachable), mini camera head Ø 26 mm (detachable), Wöhler TFT monitor 7" with 2 m cable, SD memory card 4 GB for recording of pictures and videos, mini USB cable, 30 m push rod 6.5 mm, 5 replacement plastic domes, 1 anti-slide-mat, 2 NiMH batteries and charger, plastic case

Article no. 8955 J



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/P\\_107](http://woehler-international.com/P_107)



24  
7



# Wöhler VIS 300 / 350 Visual Inspection System

Inspection of pipes / air ducts / flue systems



## Features

- Analyse damage and inspection of:
  - Waste water lines of Ø 70 mm and larger
  - House connections up to Ø 200 mm
  - Flue gas systems of Ø 56 mm and larger
  - Ventilation lines of ventilation systems
  - False ceilings, hollow spaces, shafts
- Keep your sense of orientation with home function – camera aligns itself automatically
- 4 hours flexibility – 2 rechargeable batteries for lasting mobility (optional)
- Built-in location transmitter facilitates wireless location detection
- Distance counter displayed on monitor (only Wöhler VIS 350)
- Fully equipped mobile solution in a robust, plastic case
- Bright TFT colour monitor for razor-sharp images
- Picture and video recording (only Wöhler VIS 350)

## Technical data

Monitor	TFT-Display	7" / 16:9 Format
	Resolution	1,024 x 600 px
	Power supply	space for 2 rechargeable batteries or via power supply unit
	Operating time	4 h
Push rod	Length	20 / 30 m
		electr. meter counting

## Wöhler VIS 300 Visual Inspection Camera Camera rod 20 m (EN), camera head Ø 40 mm

Scope of delivery: Wöhler VIS 300 Service Camera, digital distance measurement, pan and tilt colour camera head Ø 40 mm V2, Wöhler TFT-monitor 7" with 2 m cable, 20 m push rod Ø 6.5 mm, 5 replacement plastic domes, 1 anti-slide-mat, 1 NiMH-battery and charger, plastic case

Article no. 8788 J

## Wöhler VIS 300 Visual Inspection Camera Camera rod 30 m (EN), camera head Ø 40 mm

Scope of delivery: Wöhler VIS 300 Service Camera, digital distance measurement, pan and tilt colour camera head Ø 40 mm V2, Wöhler TFT-monitor 7" with 2 m cable 30 m push rod Ø 6.5 mm, 5 replacement plastic domes, 1 anti-slide-mat, 1 NiMH-battery and charger, plastic case

Article no. 8789 J

## Wöhler VIS 350 Service Camera (EN) Camera rod 20 m, camera head Ø 40 mm

Scope of delivery: Wöhler VIS 350 Service Camera, digital meter counter, pan and tilt colour camera head Ø 40 mm V2, Wöhler TFT monitor 7" with 2 m cable, SD memory card 4 GB SD for recording of pictures and videos, mini USB cable, 20 m push rod 6.5 mm, 5 replacement plastic domes, 1 anti-slide-mat, 2 NiMH batteries and charger, plastic case

Article no. 8794 J

## Wöhler VIS 350 Visual Inspection Camera Camera rod 30 m (EN), camera head Ø 40 mm

Scope of delivery: Wöhler VIS 350 Service Camera, digital meter counter, pan and tilt colour camera head Ø 40 mm V2, Wöhler TFT monitor 7" with 2 m cable, SD memory card 4 GB SD for recording of pictures and videos, mini USB cable, 30 m push rod 6.5 mm, 5 replacement plastic domes, 1 anti-slide-mat, 2 NiMH batteries and charger, plastic case

Article no. 8792 J



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/P\\_107](http://woehler-international.com/P_107)



# Wöhler VIS 200 / 250 Visual Inspection System

Inspection of ducts / air ducts / exhaust systems



## Features

- Analyse damage and inspect of:
  - Waste water pipes of Ø 40 – 125 mm and larger
  - Ventilation ducts of Ø 40 – 80 mm and larger
  - Inspect hollow spaces, e.g. in front-wall installations
  - Flue gas lines up to approx. Ø 125 mm
- Waterproof, light-sensitive camera head with a diameter of just 26 mm easily takes several bends
- Distance counter displayed on monitor (only Wöhler VIS 250)
- Fully equipped mobile solution in a robust, plastic case
- Bright TFT colour monitor for razor-sharp images
- Tilttable and removable monitor
- Picture and Video recording (only Wöhler VIS 250)

## Technical data

Monitor	TFT-Display	7" / 16:9 Format
	Resolution	1,024 x 600 px
	Power supply	space for 2 rechargeable batteries or via power supply unit
	Operating time	4 h
Push rod	Length	20 / 30 m
		electr. meter counting

## Wöhler VIS 200 Visual Inspection Camera Camera rod 20 m, camera head Ø 26 mm (EN)

Scope of delivery: Wöhler VIS 200 Service Camera, Wöhler colour camera head Ø 26 mm V2, Wöhler TFT monitor 7" with 2 m cable, 20 m push rod Ø 6 mm, digital meter counter, 1 anti-slide-mat, 1 NiMH-battery and charger, plastic case

Article no. 8992 J

## Wöhler VIS 200 Visual Inspection Camera Camera rod 30 m, camera head Ø 26 mm (EN)

Scope of delivery: Wöhler VIS 200 Service Camera, Wöhler colour camera head Ø 26 mm V2, Wöhler TFT monitor 7" with 2 m cable, 30 m push rod Ø 6 mm, digital meter counter, 1 anti-slide-mat, 1 NiMH-battery and charger, plastic case

Article no. 5702 J

## Wöhler VIS 250 Visual Inspection Camera Camera rod 20 m, camera head Ø 26 mm (EN)

Scope of delivery: Wöhler VIS 250 with recording function and digital meter counter, Ø 26 mm mini camera head V2, TFT monitor 7" with 2 m cable, 4 GB SD card for recording of pictures and videos, USB cable, Digital meter counter, 20 m push rod 6 mm, Anti-Slide-Mat, 1 NiMH battery and charger, Complete system in a plastic case

Article no. 8993 J

## Wöhler VIS 250 Visual Inspection Camera Camera rod 30 m, camera head Ø 26 mm (EN)

Scope of delivery: Wöhler VIS 250 Service Camera, digital meter counter, Wöhler camera head Ø 26 mm V2, 4 GB SD memory card for recording of pictures and videos, Wöhler TFT monitor 7" with 2 m cable, mini USB cable, 30 m push rod 6 mm, 1 anti-slide-mat, 1 NiMH battery and charger, plastic case

Article no. 8994 J



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/P\\_86](http://woehler-international.com/P_86)



## Wöhler L 200 Locator

Exact localisation of the camera head



### Features

- Exact localisation of the camera head in pipelines, chimneys, floor or ceiling areas etc.
- Acoustic signal for orientation via loudspeaker or headphones
- Crosshairs and signal strength indicate how far away and in which direction the camera head is located
- Quick detection of damaged areas with the camera heads Ø 26 / 40 mm
- Locating the radio signals of the camera head enables the damage site to be found quickly
- Bright, easy to read colour display
- Easy handling thanks to spatial guidance via the display during the locating
- Telescopic pole enables the detection of the damaged areas without any problems and everywhere
- Chalk holder enables the direct marking of the damaged areas

### Technical data

Locator Receiver	Display	Graphical display of the camera head position
Output impedance headphones	32 Ohm	
Power supply	Lithium-ion rechargeable battery	
Frequency	9.2 kHz, 8.9 kHz	

Compatible with all current  
Wöhler VIS camera systems!



### Wöhler L 200 Locator

Telescopic pole, Headphones, USB power supply with Micro-USB cable, Chalk (12 pcs. box, yellow), Plastic case

Article no. 7430 J


## Wöhler VIS Camera Trolley

Optimal guidance of the camera head

### Features

Optimal guiding of the camera head:

- In ventilation lines from Ø 150 mm / 150 x 150 mm
- In drain ducts from Ø 150 mm / 150 x 150 mm
- In drawn chimneys from Ø 150 mm / 150 x 150 mm
- Suitable for:
  - All Wöhler VIS camera heads (Ø 26 / 40 mm)
  - Various accessories such as additional lighting, stabilising sleeve and dome protection
- Plastic wheels ensure optimum guidance in round and flat lines
- With the help of the adjustment rail, the camera trolley can be adjusted in three heights and placed backwards or forwards in 3 steps
- Camera head can be mounted on the trolley or suspended underneath it
- Rugged body is made of corrosion and acid resistant stainless steel and is still 700 g light

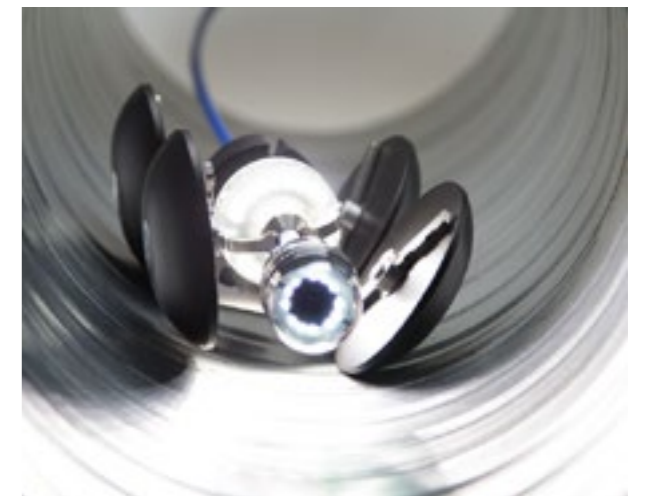

### Wöhler VIS Camera Trolley

Camerahead-holder, Storage bag Wöhler VIS Camera Trolley, For inspection of pipes > 150 mm

Article no. 4705 J

### Wöhler VIS Camera Trolley

Camerahead-holder, Storage bag Wöhler, Stabilisation sleeve for light ring 26/40, (can only be used in combination with supplementary light)

Article no. 4753 J



### Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/7430](http://woehler-international.com/7430)

















### Wöhler online shop












Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/4705](http://woehler-international.com/4705)


































# Accessories

Accessories Inspection Technology	Article no.
 Wöhler VIS 500 Monitor solo with plastic case English version	12231 J
 Wöhler Miniature Camera Head Ø 26 mm for Wöhler VIS 350 / 500 Colour, detachable, with pouch Camera head with flexible connection (PAL) for GRP camera rod and leather protective bag.	420 J
 Wöhler Camera Head Ø 40 mm for Wöhler VIS 350 / 500 detachable, pan and tilt flexible connection to camera rod, with leather protection bag	870 J
 Wöhler Light Ring 26/40, detachable for Wöhler VIS 350 / 500 for camera heads Ø 26 mm / Ø 40 mm Only for detachable camera heads – the additional lighting with 18 white LEDs is mounted between the camera head and the camera pole. Power is supplied via the video inspection system. Ø-Outside 53 mm	11398 J
 Wöhler Supplementary Light Ring for Wöhler VIS 350 / 500 for Ø51 mm pan and tilt head / Ø26 mm head / Ø40 mm pan and tilt head in combination with guidance weight incl. battery pack with four AA batteries 1.5 V in cordura bag.	9377 J
 Wöhler Car charger 18 V for Wöhler VIS 2xx / VIS 3xx / VIS 400	3169 J
 Power Supply for VIS 2xx / VIS 3xx / VIS 400 with 7" displays, approx. charge time 3 hours Eu adaptor only	3789 K
 Power Supply for VIS 2xx / VIS 3xx approx. charge time 3 hours with adaptors for all countries	4798 K
 Battery 12 V NiMH 2600 mAh for Wöhler VIS 2xx / VIS 3xx operation time: 120 min	4715 J
 Wöhler VIS Cleaning Set with plastic case 1 liter disinfection spray, 50 cleaning tissues, 100 disposable gloves size XL (powder free), 200 ml lubricant, plastic case For approx. 50 applications	4725 I
 Wöhler VIS Cleaning Set Refill 1 liter disinfection spray, 50 cleaning tissues, 100 disposable gloves size XL (powder free), 200 ml lubricant, in plastic bag For approx. 50 applications.	4726 O
 Aluminium Case XXL for Wöhler VIS 350 / 500 48 x 27 x 48 cm	5824 J
 Guidance Weight for Wöhler VIS 350 / 500 / 700 for camera heads and rods for lowering the camera head – compensates for the bending of the GRP camera rod. Stainless steel guide weight 740 g	3857 J
 Wöhler Camera Spring Guide for Wöhler VIS 500 / 700 for Wöhler pan/tilt camera head Ø 40 mm	7081 J

Accessories Inspection Technology	Article no.
 Guidance Sleeve for camera head Ø 26 mm increases arc mobility and protects the camera head	3827 J
 Guidance Sleeve with protection cage for camera head Ø 26 mm increases arc mobility, protects the camera head and also the lens	3847 J
 Protection Sleeve for Wöhler Camera Head Ø 40 mm Easy installation and secure hold thanks to clamping lever, particularly good visibility thanks to a round recess in the dome area	2641 J
 Replacement Plastic Domes (10 pcs.) for Wöhler Camera Head Ø 40mm	3675 J
 Glass Dome for Wöhler Camera Head Ø 40 mm	13674 J
 Wöhler Guidance Set 70 for camera head Ø 26 mm guidance sleeve with protection cage, centering brush	3883 J
 Guidance Set 100 for camera head Ø 40 mm protection sleeve with cut-out, roller guide and centering brush	4240 J
 VIS Centering Brush for Wöhler VIS 250 / 350 / 500 / 700 for camera heads and rods Ø 20 cm with 6 strip brushes as spacers, can be fixed directly behind the camera head	3850 J
 VIS Centering Brush for Wöhler VIS 250 / 350 / 500 / 700 for camera rods Wöhler rod element Ø 20 cm with 6 strip brushes, threaded on one side	3854 J
 Centering Brush Extension for Wöhler VIS 3xx (detachable versions) / VIS 400 / VIS 700 Ø 20 cm to extend centering brush art. 3854	3853 J
 Relining Adapter for VIS 350 PLUS / VIS 500 only for detachable versions	6888 J

# Accessories

Accessories Inspection Technology	Article no.
 Camera holder for Wöhler 500 for pan and tilt camera head Ø 40 mm	3720 J
 Camera Roller Guide for Wöhler VIS 350 / 500 / 700 suitable for camera heads and rods	3681 J
 Stabilisation Tube for Wöhler VIS 3xx (detachable versions) / VIS 400 / VIS 700 to connect centering brush & extension	21736 J
 Wöhler Stabilisation sleeve aluminium for Ø 50 mm pan and tilt camera heads for use with camera cable: head can be pushed upwards with GRP Rods	22182 K
 Spare Brushes for centering brush, 24 pieces for replacing the camera guide, rod element and extension element Can be flexibly cut to Ø 70 to Ø 200 mm	3858 J
 Guidance Ball for Wöhler VIS 350 / 500 / 700 for camera heads and rods Ø 30 x 27 mm for GRP camera rods Ø 6, Ø 6.5 and Ø 7 mm as well as for miniature camera heads improves ability to go through bends for miniature camera head 26 mm	3634 J
 Guidance Weight for Wöhler VIS 350 / 500 / 700 for camera heads and rods   for lowering the camera head - compensates for the bending of the GRP camera rod. Stainless steel guide weight 740 g	3857 J
 Wöhler Glare Protection for Wöhler VIS 2xx / 3xx	6814 J
 Anti Slide Mat for Wöhler VIS 350 / 500 / 700 30 x 12 cm washable up to 60 °C	3252 J
 Wöhler Telescopic Tube 1.6 m for all camera heads with flexible gooseneck for all camera heads, length of the telescopic tube 0.9-1.6 m plus gooseneck 0.3 m	7005 O
 Wöhler Telescopic Tube 3.4 m for all camera heads with flexible gooseneck length of the telescopic tube 0.9-3.4 m plus gooseneck 0.3 m	7024 O
 Carrying Strap System for Wöhler VIS 500 / 700 with mounting plate for monitor unit	6921 J
 Magnetic Holder Monitor for Wöhler VIS 500 / 700	2939 J
 Anti-reflective Film for Wöhler VIS 500 / 700 with mounting accessories Display protection function   150 x 94 mm	7616 X

Accessories Inspection Technology	Article no.
 Wöhler Camera Viper for Wöhler VIS 400 / 500 with digital meter counter, belt holder and stand	7302 J
 push rod 20 m / Ø 6.5 mm / blue	7301 J
 push rod 30 m / Ø 6.5 mm / blue	7309 J
 push rod 20 m / Ø 7 mm / red	7307 J
 push rod 30 m / Ø 7 mm / red	7308 J
 push rod 20 m / Ø 6 mm / black	7336 J
 push rod 30 m / Ø 6 mm / black	15121 J
 Cable reel for Wöhler VIS 500 with digital meter counter	15122 J
 with 20 m camera cable	9172 J
 with 30 m camera cable	7812 J
 Wöhler Camera Cable for Wöhler VIS 400 / 500   with metric marking 20 m	7845 J
 30 m	8636 J
 50 m	8048 J
 Wöhler Camera Extension Cable for Wöhler VIS 400 / 350 / 500 with metric marking The camera cable can be extended to a maximum length of 50 metres without interference.	5706 I
 10 m	
 30 m	
 Wöhler Lowering Aid for Wöhler VIS 500 / 700 made of stainless steel / extendable from 16 - 40 cm the roller remains centred even when the lowering aid is extended particularly advantageous when working with camera head and camera cable	

# Wöhler SI 400 Smart Inspection Camera

Quick inspection with HD quality of flue gas pipes, air ducts and chimneys



### Features

- Small, handy camera for quick use
- Practical accessories for easy visual inspection with little effort
- Everything is visible with the sharp HD picture and bright lighting
- Intuitive operation via the free Wöhler Smart Inspection App
- Image and video material can be conveniently downloaded from the Wöhler Smart Inspection App
- Image and video material is sent to the customer or to the office

### Technical data

Camera head dimensions	Ø 40 mm
Connection	M5 thread compatible with all Wöhler Vipers with M5 or M10 thread (with adaptor) also compatible with Industry Sweeping Rods
Image transmission	Via the device's internal WiFi in the Wöhler Smart Inspection App
Image quality	HD

### Accessories



#### VIS Centering Brush

for camera rods  
Centres the GRP camera rod and is used to guide the camera head in conjunction with the camera roller guide and/or with the extension element or extension piece  
For GRP rods up to Ø 7 mm

Scope of delivery: Wöhler rod element Ø 20 cm with 6 strip brushes, threaded on one side



#### Thread Adapter M5 to M10

For use with the Wöhler SI 400 Smart Inspection Camera with GRP rods with M10 internal thread.

### Article no.

3854 J

10276 J



## Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/shop/P\\_200](http://woehler-international.com/shop/P_200)



### Wöhler SI 400 Smart Inspection Camera

#### Basic Set

Wöhler SI 400 Smart Inspection Camera, with Li-Ion battery, Bag, Guidance Ball, Protection Sleeve, 32 GB Memory Card

Article no. 12400 A

### Wöhler SI 400 Smart Inspection Camera

#### Professional Set

Wöhler SI 400 Smart Inspection Camera, Bag, Guidance Ball, Protection Sleeve, 32 GB Memory Card, VIS Centering Brush, Thread Adapter

Article no. 12401 A

## Wöhler Glass Mirror

Exhaust gas system check



### Features

- Inspection of:
  - Objects hard to reach
  - Chimneys
  - Buildings
- Glass mirrors with high optical quality
- Mirrors can be rotated and tilted
- Protected by aluminium frame
- Practical telescopic handle – easy to pull out from 20 to 99 cm



### Wöhler Glass Mirror Small with telescopic handle

Scope of delivery: Glass mirror 2.6 x 7 cm, Imitation leather cover, Telescopic handle extendable up to 99 cm, Ball joint (can be swivelled and tilted)

Article no. 8064 O

### Wöhler Glass Mirror Medium with telescopic handle

Scope of delivery: Glass mirror 5 x 8 cm, Imitation leather cover, Telescopic handle extendable up to 99 cm, Ball joint (can be swivelled and tilted)

Article no. 8059 O

### Wöhler Glass Mirror Large with telescopic handle

Scope of delivery: Glass mirror 8 x 15 cm, Imitation leather cover, Telescopic handle extendable up to 99 cm, Ball joint (can be swivelled and tilted)

Article no. 8087 O

## Wöhler Chimney Mirror

Exhaust gas system check

### Features

- Inspection of:
  - Objects hard to reach
  - Chimneys
- Robust metal mirror
- Polished and high-gloss chrome-plated, good optical quality
- Tilttable mirror on handle
- Screwable telescopic handle extendable from 30 to 54 cm



### Wöhler Chimney Mirror Small

Wöhler chimney mirror, metal mirror plate 7 x 10 cm with leather sleeve

Article no. 1015 O

### Wöhler Metal Chimney Mirror Small with telescopic handle

High-gloss chrome-plated metal mirror, 6.8 x 10 cm, telescopic handle 54 cm long, with imitation leather cover

Article no. 1748 O



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/P\\_22](http://woehler-international.com/P_22)



24  
7



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/P\\_11](http://woehler-international.com/P_11)



24  
7

# Wöhler VE 500 HD Video Endoscope

Inspection of inaccessible spaces / with integrated monitor



### Features

- HD inspection of:
  - Inaccessible spaces through the smallest openings from Ø 4 mm
  - Pre-wall installations, spouts, drainage pipes, fireplaces, combustion chambers, connecting pieces
  - Inspection openings and fire damper
- Large colour monitor
- Image rotation
- Split screen mode
- Stand for positioning the monitor
- Can be used on several devices simultaneously
- Additional LED lamp on the endoscope to illuminate the inspection area



### Technical data

Monitor	Size	7"
	Resolution	1,280 x 720 px
	Interfaces	Micro-USB data / charging port Micro SD card slot
Video endoscope HD Probe camera head	Protection class	IP 67
Recording formats	Image file	JPG
	Video file	AVI
Power supply	Lithium-ion rechargeable battery	
Operating time	5 – 6 h	

# Wöhler VE 400 HD Video Endoscope

HD inspection of inaccessible spaces



### Features

- HD inspection of:
  - Inaccessible spaces through the smallest openings from Ø 4 mm (e.g. tile spacers)
  - Pre-wall installations, sinks, drain ducts
  - Fireplaces, combustion chambers, connectors
  - Inspection openings and fire dampers
- Large 5" HD colour monitor
- HD Video Endoscope waterproof probes
- Image rotation
- Image and video recording on Micro-SD Card
- Additional lamp on the unit with 4 LEDs to illuminate the inspection area
- Ø 3.9 mm probe for smallest inspection openings
- Switchable 0°/90° straight line / side view probe Ø 5.5 mm

### Technical data

Monitor	Display	5"
	Resolution	1,280 x 720 px
	Interfaces	Micro-USB-Data / charging connection Micro-SD Card slot
HD Probe camera head	Protection class	Waterproof IP 67
File formats	Image format	JPG
	Video format	MP4
Power supply	Lithium-ion rechargeable battery	
Operating time	4 hours	



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/P\\_99](http://woehler-international.com/P_99)



### Wöhler VE 500 HD-Video-Endoscope incl. probe Ø 5.5 mm / 1 m / 90°

Scope of delivery: Wöhler VE 500 HD video endoscope with WiFi function and USB C, HD video endoscope combination probe Ø 5.5 mm / 1 m / 90°, Lithium ion battery, Micro SD card 32 GB, USB charger, Connection cable 1.5 m, Carrying case

Article no. 11390 A



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/P\\_169](http://woehler-international.com/P_169)



### Wöhler VE 400 HD Video Endoscope HD Probe 1 m, Ø 5.5 mm, view 0° / 90°

Scope of delivery: Wöhler VE 400 HD Video Endoscope, HD-Video-Endoscope-probe 0° / 90° / Ø 5.5 mm / 1 m, lithium-ion battery, micro SD card 16 GB, micro USB charger, extension cable 1.5 m, case

Article no. 6920 A

# Wöhler VE 220 HD Video Endoscope

HD Inspection of inaccessible cavities



### Features

- HD inspection of:
  - Inaccessible cavities through smallest openings from Ø 6 mm (e.g. tile cross)
  - Pre-wall installations, sinks, drain ducts
  - Fireplaces, combustion chambers, connectors
  - Inspection openings and fire dampers
- Transmission of image and video data via WiFi to smartphone, laptop, tablet, PC
- Can be used simultaneously on several devices
- Direct forwarding of pictures and videos via "Share function" of the smartphone/tablet
- Image and video recording
- Switchable hand lamp
- Compatible with Android/iOS
- Probe length up to 10 m



### Technical data

Signal transmission	Wireless LAN Network Standard	IEEE 802.11 b/g/n
	Data transmission rate	up to 150 Mbit/s wireless card with 802.11 a/b/g/n
HD Probe camerahead	Protection	waterproof IP 67
File formats	Image format	JPG
	Video format	AVI
Power supply	2.600 mAh Lithium-ion rechargeable battery	

### Wöhler VE 220 HD Video Endoscope HD Probe 1 m, Ø 7.6 mm

Scope of supply: Wöhler VE 220 HD Video Endoscope with 1.0 m probe Ø 7.6 mm, side tip mirror, magnet, hook tool, plastic case

(The VE 220 is not compatible with Windows Phone)

Article no. 12132 I

# Probes for all endoscopes



HD-Video-Endoscope-Probe  
Ø 3.9 mm / 1 m  
Article no. 6929 A



HD-Video-Endoscope-Probe  
Ø 5.5 mm / 1.2 m  
Article no. 7787 I



HD-Video-Endoscope-Probe  
Ø 25 mm / 3 m  
Article no. 6911 A



HD-Video-Endoscope-Probe  
(2 Cameras)  
Ø 5.5 mm / 1 m / 0° / 90°  
Article no. 11415 A



HD-Video-Endoscope-Probe  
(2 Cameras)  
Ø 8.5 mm / 3 m / 0° / 90°  
Article no. 11416 A



HD-Video-Endoscope-Probe  
(3 Cameras)  
Ø 7.9 mm / 10 m / 0° / 2 x 90°  
Article no. 11417 A



HD-Video-Endoscope-Probe  
(3 Cameras)  
Ø 25 mm / 5 m / 0° / 2 x 90°  
with roller guide  
Article no. 11419 A



HD-Video-Endoscope-Probe  
(3 Cameras)  
Ø 25 mm / 10 m / 0° / 2 x 90°  
with roller guide  
Article no. 11418 A



HD-Video-Endoscope-Probe  
(swivelling)  
Ø 6.2 mm / 1.5 m / 180°  
Article no. 11321 A



Large protective bag  
for Wöhler VE series  
and probes  
Article no. 10185 A




Protection bag  
for Wöhler VE series  
and probes  
Article no. 6914 A

## Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[woehler-international.com/P\\_136](http://woehler-international.com/P_136)





## INTERNATIONAL OPERATING, INDEPENDENT, GERMAN FAMILY-OWNED COMPANY

For over 90 years, we have been a technically orientated, internationally operating family business with more than 250 employees worldwide. We are a leading manufacturer of measurement technology, inspection technology and cleaning technology with headquarters in Bad Wünnenberg, Germany.

Scan the QR code and find out more about our corporate culture, how we are committed to sustainability and how we act as an employer.



[woehler-international.com/  
company](https://www.woehler-international.com/company)

---

# **WÖHLER**

**Wöhler Technik GmbH**  
**Headquarters Germany**

Wöhler-Platz 1 · 33181 Bad Wünnenberg

**Phone: +49 2953 73 100**

**[www.woehler-international.com](https://www.woehler-international.com)**