

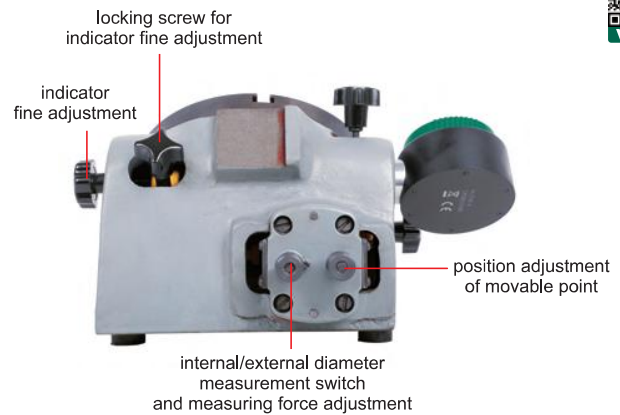



INTERNAL AND EXTERNAL DIAMETER COMPARISON INSTRUMENT

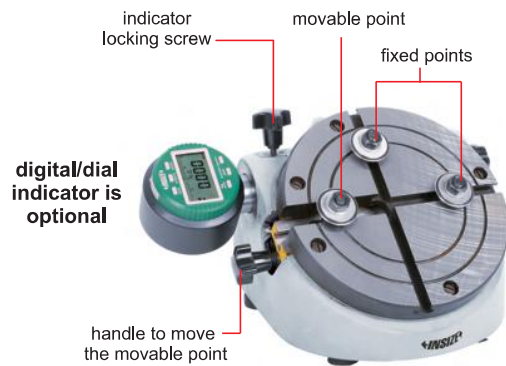


- Measure internal/external diameter, variation and taper
- Total range of movable point: 2mm, effective range of movable point: $\pm 0.1\text{mm}$
- Optional accessory: $\varnothing 28\text{mm}/\varnothing 8\text{mm}$ bush (code **6843-B8**), 0.001mm digital/dial indicators, high precision digital indicators (code **2140-6**, **2140-6WL**)

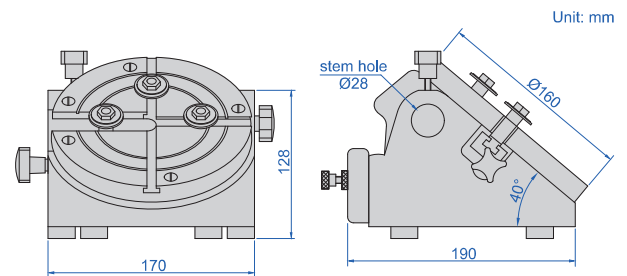

internal diameter measurement

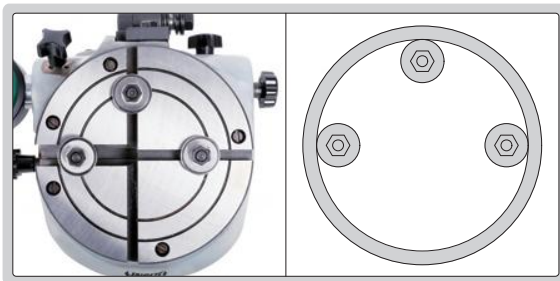

external diameter measurement

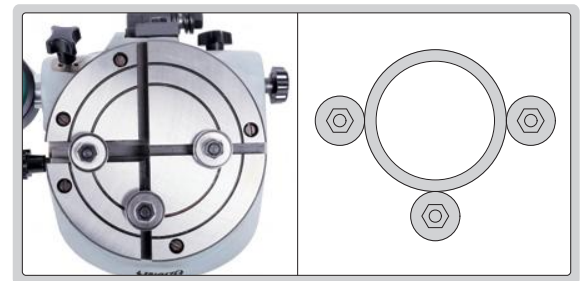

Code	Applicable holding stem	Range of internal diameter	Range of external diameter	Accuracy	Repeatability
6843-140	$\varnothing 28\text{mm}$	50-140mm/2-5.5"	30-120mm/1.2-4.7"	$\pm 0.001\text{mm}$	0.001mm

$\varnothing 28\text{mm}/\varnothing 8\text{mm}$ bush (optional)



Code
6843-B8

application

