

*Available for measurement at low frequency with ferrite absorber.  
Optimum for wireless system test for technical  
standard, receiving sensitivity test and EMC test.*




### Standard specifications


Outside dimensions	915(W) x 650(H) x 585(D) mm *exclude handle and projection
Inside dimensions	810(W) x 506(H) x 506(D) mm
Weight	typeA : approx. 165kg typeB : approx. 123kg
Connectors	SMA (2pcs)
Structure	Triple structure composed of radio wave absorber, aluminum plate and stainless steel
Shielding characteristics	more than 50dB @300MHz
Reflection loss	typeA : $\geq 20$ dB @50 to 800MHz~ typeB : $\geq 20$ dB @50 to 430MHz~

### About radio wave absorber

Radio wave absorber of ferrite



- **Frequency range**
  - typeA 50 to 800MHz~
  - typeB 50 to 430MHz~
- **Test equipments**
  - Keyless entry
  - Cellular phone (PDC, GSM)
  - Other wireless equipment lower than 1GHz

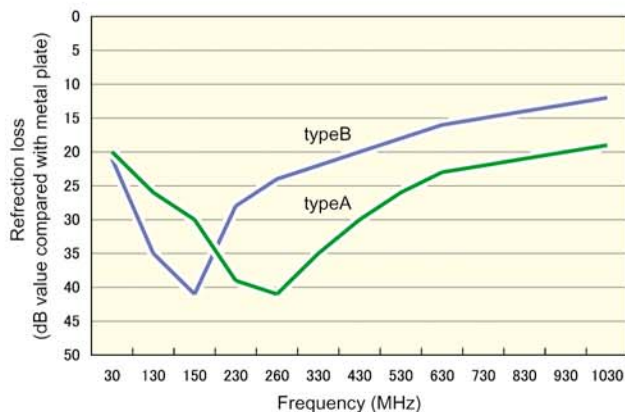

### Examples of custom-made

Capable of changing or adding size, connector or function from / to above standard specifications.

- Table for DUT
- Turn table
- Receiving antenna (Selection of optimum antenna suited for DUT)
- Reference antenna (Selection of optimum antenna suited for DUT)
- Door
- Adding RF connectors (N, SMA, BNC, etc)
- Adding multi pins connector (D-sub, etc)
- Changing size
- Changing shape
- Selection of radio wave absorber
- Others